




# Fullwat®

## iluminación

### PANELES LED FRAMELESS (3D)

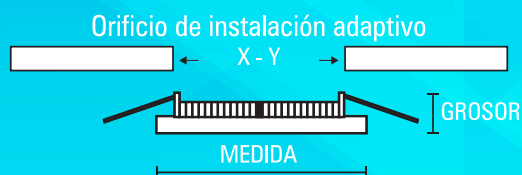

#### INCRUSTAR

Código	Potencia	Tipo	Luminosidad	Medida	Grosor	Orificio adaptivo	U/E
107286	9W	Redondo	600 - 720 lm	Ø 90 mm	24.5 mm	55 - 75 mm	100
107287	18W	Redondo	1150-1380 lm	Ø 120 mm	24.5 mm	56 - 95 mm	60
107288	24W	Redondo	1550-1800 lm	Ø 170 mm	24.5 mm	57 - 155 mm	40
107461	36W	Redondo	2350 - 2600 lm	Ø 220 mm	24.5 mm	58 - 195 mm	30
107292	9W	Cuadrado	600 - 720 lm	λ 90 mm	24.5 mm	55 - 75 mm	100
107293	18W	Cuadrado	1150-1380 lm	λ 120 mm	24.5 mm	56 - 95 mm	60
107294	24W	Cuadrado	1550-1800 lm	λ 170 mm	24.5 mm	57 - 155 mm	40
107460	36W	Cuadrado	2350 - 2600 lm	λ 220 mm	24.5 mm	58 - 195 mm	30

- Resiste picos de voltaje
- Larga vida útil
- Fácil instalación
- 28.000Hs
- Libre de Mercurio
- IP20 interiores

Luz día 6500K

"PUEDEN SER USADOS CON SENSORES DE MOVIMIENTO"

- 3D
- 75 - 95 LM/W Eficiencia



#### SOBREPONER

Código	Potencia	Tipo	Luminosidad	Medida	Grosor	U/E
107289	18W	Redondo	1180 - 1400 lm	Ø 120 mm	42 mm	60
107290	24W	Redondo	1750 - 1900 lm	Ø 170 mm	42 mm	40
107462	36W	Redondo	2350 - 2600 lm	Ø 220 mm	42 mm	30
107463	18W	Cuadrado	1180 - 1400 lm	λ 120 mm	42 mm	60
107464	24W	Cuadrado	1750 - 1900 lm	λ 170 mm	42 mm	40
107465	36W	Cuadrado	2350 - 2600 lm	λ 220 mm	42 mm	30

